

IRU152-EVK-DC

Robust RISC-based DIN-rail Fanless Embedded System with Microphone Sensor Module

Features

- RISC-based (i.MX 6UltraLite) processor 528 MHz
- 512MB DDR3 SDRAM onboard
- 8GB eMMC flash onboard
- 2 Mini Card slots (Wi-Fi, 3G/4G or LoRa)
- 4 isolated analog input channels (16-bit, 250 kS/s)
- 1 isolated COM port
- 1 isolated DIO (2-in/2-out)
- Embedded Linux operating system (Yocto)
- Support LabVIEW versions later than 2016
- Support OPC UA



Introduction

The IRU152 DIN-rail fanless embedded system utilizes a low power RISC-based (i.MX 6UL) processor, one RS-232/422/485 serial port, one LAN, two digital input channels, two digital output channels, four analog input channels, designed to withstand temperatures ranging from -40°C to +70°C for applications in extreme operating environment and industrial automation.


Also, the IRU152 can record digital/analog signal of devices and control digital devices. It can offer a simple, scalable web-based monitoring solution providing real-time data views, on-board data logging/trending, and simple control over Modbus devices. Embedded math function such as RMS and FFT are used to make advanced diagrams. The ready-to-run IRU152 is specially designed for remote control/monitoring management applications ideal in a unmanned control room, an industrial machine, an automatic parking lot, a traffic cabinet, just to name a few.

Microphone Sensor Module

Operating voltage 5V
 Analog voltage signal output, signal amplitude VCC/2
 Good sensitivity, built in amplifier circuit, adjustable gain
 A voltage signal capable of obtaining sound intensity via AD conversion

Specifications

Construction	Extruded aluminum and heavy-duty steel, IP40	
CPU	NXP i.MX 6 UL processor, ARM® Cortex®-A7 @ 528 MHz	
System Memory	1 x DDR3-1600 onboard, 512 MB	
System I/O Outlet	Serial Port	1 x RS-232/422/485 Magnetic isolation protection 2KV
	LAN	1 x 10/100 Mbps Ethernet Magnetic isolation protection 1.5KV
Analog Input	4 x AI (Isolation)	channels: 4 Input Type Differential Input Range: (Software programmable) Unipolar: 0 ~ 10V, 0 ~ 5V Bipolar: ±10V, ±5V Resolution: 16-bit Sampling Rate: 10 S/s to 250 kS/s FIFO Buffer Size: 2,048 samples Overvoltage Protection: ±55V Trigger source: Analog or digital (software selectable)
	USB	1 x USB 2.0 (Type A)
DIO	1 x DIO (2-in/2-out) with Isolation 2KV DI: Wet/Dry We	

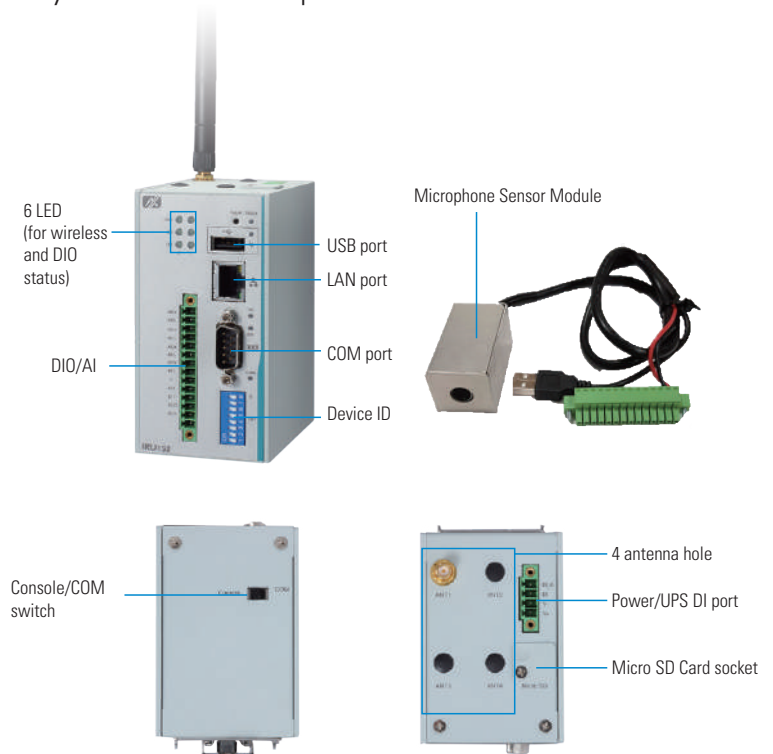

System I/O Outlet	DIO	DI: Input channels: 2 source type Input voltage: 0 to 30 VDC digital input levels for dry contacts: -Logic level 0: close to GND -Logic level 1: open Digital input levels for wet contacts: -Logic level 0: +10V to +24V (DI to COM-) -Logic level 1: +3V max. DO: Output channels: 2, sink type Output current: max. 200 mA per channel On-state voltage: 24VDC nominal, open collector to 30V Optical isolation protection 2 KV
	Console Port	Yes For user setting with debug
	EEPROM	1 x EEPROM (2 Kb)
	Device ID	ID setting 0 ~ 255
	Wireless	2 x Mini Card slot 1 x SIM Card socket
Watchdog Timer	WDT 1: 0.5 to 128 sec. with a time resolution of 0.5 sec.	
RTC	Yes (RTC battery on board)	
LEDs	2 x LED for dual wireless status 2 x LED for DI status 2 x LED for DO status	
Storage	1 x eMMC 8GB flash onboard	
Power Supply	9 ~ 48 VDC power input range	
Operating Temperature	-40°C ~ +70°C (-40°F ~ +158°F)	
Storage Temperature	-45°C ~ +85°C (-49°F ~ +185°F)	
Humidity	10% ~ 95%	
Vibration Endurance	2 Gms @ (10 ~ 150Hz sine wave; operation)	
Dimensions	55 mm (2.16") (W) x 82 (3.23") mm (D) x 108 (4.25") (H)	
Weight (net/gross)	0.32 kg (0.71 lb)/0.53 kg (1.17 lb)	
Installation	DIN-rail	
Certificate	FCC Part 15 Heavy Industrial CE	


Wireless Information

4G module	4G Mini card LTE SIERRA AIRPRIME MC7304 (Option)	Standards: LTE Cat.3 Interface: USB Radio Band/ Frequencies (MHz): 850(5) / 900(8) / 1800(3) / 1900(2) @GSM 850(5) / 900(8) / 1900(2) / 2100(1) @UMTS 800(20) / 900(8) / 1800(3) / 2100(1) / 2600(7) @FDD LTE Region: Global
Wi-Fi module	Wi-Fi Mini card Sparklan WPEQ-160ACN (Option)	Qualcomm Atheros QCA9377-7 Antenna:2xUFL connectors, 1T1R Operating Frequency: 802.11 ac/a/b/g/n ISM Band 2.412GHz-2.472GHz, 5.180MHz-5.825MHz Interface: USB Region: Global
3G module	3G Mini card Quectel UC20G (Option)	UMTS:800/ 850/ 900/ 1900/ 2100MHz GSM/EDGE 850/ 900/1800/ 1900MHz Region: Global
4G module	4G Mini card LTE RYR2800 (uBlox R280) (Option)	Standards: LTE Cat.1 Interface: USB Radio Band/ Frequencies (MHz): LTE bands1, 3,5,7,8,28) Region: TW, AU
	4G Mini card LTE RYR2110 (uBlox R211) (Option)	Standards: LTE Cat.1 Interface: USB Radio Band/ Frequencies (MHz): LTE bands1, 3,7,20) Region: EU

Packing list

- 1 x IRU152 system
- 1 x CD
- 8 x Screws
- 1 x Din-rail kit
- 1 x 4-pin terminal block for power port
- 1 x 14-pin terminal block for DIO/AI port
- 1 x Power code
- 1 x Adapter
- 1 x Microphone sensor module

Dimensions

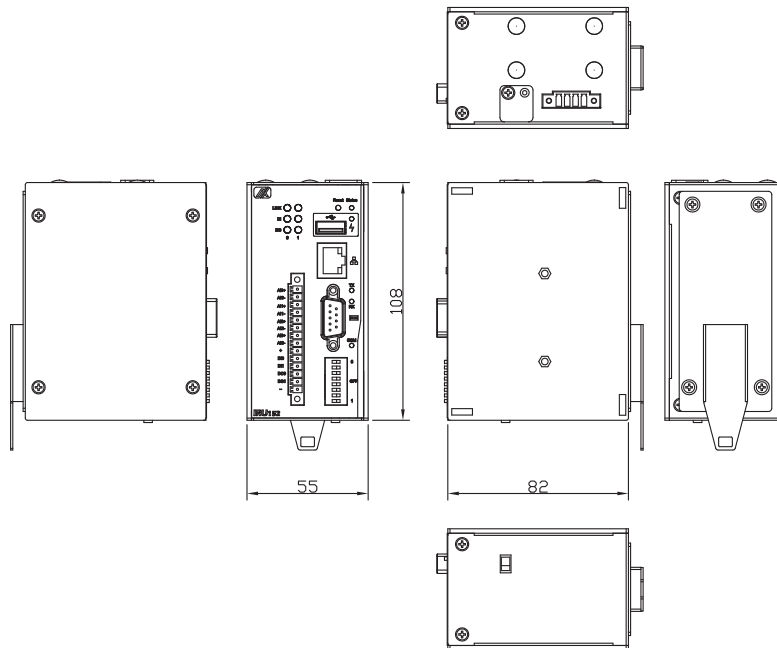

Software Specifications

OS	Linux Kernel 3.14.52 Yocto FIDO 1.8
Support Protocol Types	ICMP, TCP/IP, UDP, ARP, Telnet, SNMP, HTTP, HTTPS, SSL, SMTP, FTP, TFTP, NTP, DNS, PPP, PPPoE, DHCP, NFS
Support Software Types	Serial Server Supports TCP Server/TCP Client/UDP/Pair/VC Supports IP filter Supports 32 TCP connections
	Modbus Supports Modbus TCP/Modbus RTU/Modbus ASCII Supports TCP for multiple COM port
Setting Configuration	SNMP Supports V1/V2C/V3 Supports SNMP Private MIB Supports read/write
	http/https Supports SSL Supports Import/export Supports FW update
	Remote Manager Remote Log Email SNMP Supports Trap
Alert Function	Yes

Ordering Information

Standard

IRU152-FL-DC	Robust DIN-rail fanless embedded system with i.MX 6UL processor, COM, LAN, DIO (2-in/2-out), 4 AI (16-bit, 250 kS/s) and 2 Mini Card slots (-40°C ~ +70°C)
IRU152-EVK-DC (P/N: S27115211E)	Robust DIN-rail fanless embedded system IRU152-FL-DC with power code, adapter and microphone sensor

Optional

Wireless (3G/GPS or Wi-Fi) module