


# GOT317B-ADL-TRD NEW

17" SXGA Fanless Touch Panel Computer with LGA1700 Socket 14th/13th/12th Gen Intel® Core™ i9/i7/i5/i3 or Pentium® Processor



- |  |                |
|--|----------------|
| 1. Power button                              | 7. USB 2.0     |
| 2. Phoenix type connector for DC power input | 8. Gigabit LAN |
| 3. Grounding hole                            | 9. COM1        |
| 4. Remote power switch                       | 10. HDMI 1.4b  |
| 5. Flexible I/O window                       | 11. Line-out   |
| 6. USB 3.2 Gen1                              | 12. COM2       |

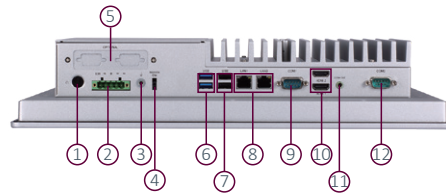

▲ Side view



▲ Rear view



Fanless



IP65



Wide Temp.

## Features

- 17" SXGA LCD with 350 nits of brightness
- 5-wire resistive touch
- Supports one 2.5" SATA HDD/SSD
- Flat front panel touch screen with rugged IP65 front bezel
- Fanless design
- Supports WLAN module and antenna (optional)
- Supports 4 USB and 2 COM ports
- TPM 2.0 onboard
- Swappable HDD tray
- Supports panel mount, VESA mount, desktop stand, and wall mount



## Introduction

The GOT317B-ADL-TRD is a versatile touch panel PC featuring a fanless design and a 17-inch SXGA LCD display. It supports the LGA1700 socket 14th/13th/12th gen Intel® Core™ i9/i7/i5/i3 or Pentium® processor. Additionally, it offers M.2 Key E and PCIe Express Mini Card slots for effortless integration of add-on devices including Wi-Fi modules, making it an ideal choice for applications such as factory automation and oil pipe monitoring systems.

### 17" SXGA LCD with 5-wire resistive touch

The 17-inch SXGA touch panel PC supports a brightness of 350 nits, enabling HD resolution content display. Its fanless design and flat-panel touch screen enhance usability, enabling intuitive operation and ensuring a user-friendly experience.

## Specifications

Front Bezel	IP65 front bezel	
LCD Panel	Display Type	17" SXGA TFT LCD
	Brightness (cd/m <sup>2</sup> )	350 nits
	Resolution	1280 x 1024
Main System	CPU	LGA1700 socket 14th/13th/12th gen Intel® Core™ i9/i7/i5/i3 or Pentium® processor (up to 35W)
	Chipset	Intel® H610
	System Memory	1 x 260-pin DDR4 3200MHz SO-DIMM, up to 32GB
	BIOS	AMI UEFI BIOS
	Storage	1 x 2.5" SATA HDD (WT)/SSD (7 mm and 9.5 mm height, removable)
	Watchdog Timer	255 levels, 0 to 255 sec.
	Onboard Graphics	Intel® UHD Graphics 770
I/O Connector	1 x 9-pin D-sub Male RS-232/422/485 1 x RS-232 via cable 1 x Flexible I/O window with support for COM3, COM4, and DIO (on-board optional) 1 x RJ-45 for 10/100/1000Mbps (Intel® I219-V) 1 x RJ-45 for 10/100/1000/2500Mbps (Intel® I225-V) 2 x USB 3.2 Gen1 (Type A) 2 x USB 2.0 (Type A) 1 x Phoenix type connector for DC power input 1 x Switch for power on/off (ATX) 1 x Line-out 2 x HDMI 1.4b 1 x Remote power switch 1 x Grounding hole	
TPM	TPM 2.0	
Expansion Interface	1 x M.2 Key E 2230 with PCIe x1 and USB 2.0 1 x PCI Express Mini Card (USB+PCIe signal+nano SIM slot "LTE")	
Touchscreen	5-wire resistive touch screen	
Power Supply	10 to 36V DC-in (typical 12/24VDC) via terminal block	
Power Consumption	120W	
Dimensions (W x D x H)	398 x 77.5 x 330.45 mm (15.67" x 3.05" x 13")	
Packing Dimensions (W x D x H)	625 x 260 x 600 mm (24.61" x 10.24 x 23.62")	
Weight (net/gross)	7.36 kg (16.22 lb)/11 kg (24.25 lb)	
Operating Temperature	-10°C to +50°C (35W CPU/SSD)	
Relative Humidity	10% to 95% @ +40°C; non-condensing	
Operation Vibration	1G/5 to 500Hz/operation (SSD, random)	
Certifications	CE Class A, IEC/EN 61000-6-4, and IEC/EN 61000-6-2 FCC 47 CFR Part 15 Subpart B (Class A) UKCA RoHS standard	

## Ordering Information

GOT317B-ADL-TRD (P/N: E22B317B00)	17" SXGA TFT fanless touch panel computer with LGA1700 socket 14th/13th/12th gen Intel® Core™ i9/i7/i5/i3 or Pentium® processor (up to 35W), 5-wire resistive touch screen, and 10 to 36 VDC terminal block with small Phoenix connector
-----------------------------------	--

\* Other configuration by request

\* Specification and certifications may vary based on different requirements



## Packing List

1 x GOT317B-ADL-TRD  
 1 x Phoenix connector  
 1 x Panel mount kit set

## Optional Accessories

4G LTE Kit

Wi-Fi kit

594K6220210E	Remote power cable, L= 720 mm
E29R131114	Wall mount kit
50906A24000E	Adapter 24V230W FSP230-AAAN3 WIRE FSP
509000001500	Adapter 24V120W FSP120-AAAN3 WIRE FSP
E29R131102	GOT3177T Panel mount kit (E)
E392902103	AX92902 + AX93287 full-size PCI Express Mini module with Gigabit LAN
E392903102	AX92903 full-size PCI Express Mini module with CAN Bus
E392906101	AX92906 full-size PCI Express Mini module with COM
E392918103	AX92918 full-size PCI Express Mini module with 2 Gigabit LAN

## Optional OS Installation

Win 10, Win 10 IoT, Win 11, Win 11 IoT, and Linux

## Dimensions

