



# GOT321W-521

21.5" FHD TFT Expandable Touch Panel Computer with LGA1151 9th/8th Gen Intel® Core™ i7/i5/i3, Intel® Pentium® Gold or Intel® Celeron® Processor (up to 35W)

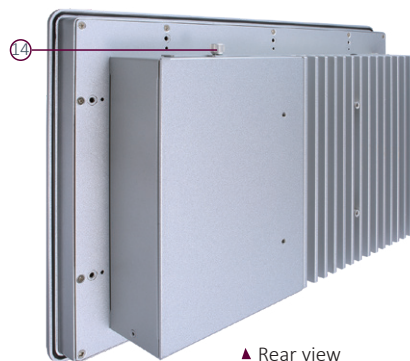

▲ Rear view

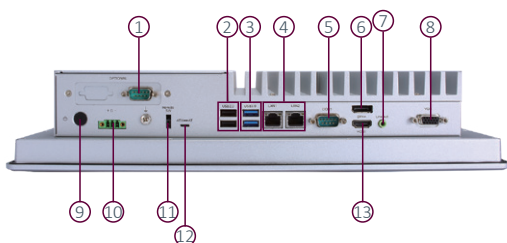

- |                    |                                       |
|--------------------|---------------------------------------|
| 1. 1 x COM (cable) | 8. 1 x VGA                            |
| 2. 2 x USB 2.0     | 9. Power button (ATX)                 |
| 3. 2 x USB 3.0     | 10. Terminal block for DC power input |
| 4. 2 x LAN         | 11. Remote power switch               |
| 5. 1 x COM         | 12. AT/ATX selectable switch          |
| 6. 1 x DisplayPort | 13. 1 x HDMI                          |
| 7. 1 x Line-out    | 14. Swappable HDD                     |



Fanless



Dual-View



DDR4



USB 3.0



IP65

## Features

- 21.5" FHD 10-point multi-touch projected capacitive widescreen or 5-wire resistive touch
- Fanless design with LGA1151 9th/8th gen Intel® Core™ i7/i5/i3, Intel® Pentium® Gold or Intel® Celeron® processor
- Supports WLAN module and antenna (optional)
- 2.5" SATA HDD/SSD
- 2 LAN, 4 USB, 2 COM, 1 HDMI, 1 DisplayPort, and 1 VGA
- IP65-rated aluminum front bezel
- Supports panel mount, VESA mount, and wall mount

## Introduction

The GOT321W-521 is a fanless panel PC with 21.5-inch FHD LCD and supports LGA1151 9th/8th gen Intel® Core™ i7/i5/i3, Intel® Pentium® Gold or Intel® Celeron® processor (up to 35W). It also provides M.2 Key E and PCI Express Mini Card slots for add-on devices (e.g. Wi-Fi module) for factory automation and oil pipe monitoring system.

### 21.5-inch FHD LCD with PCT or Resistive Touch

The GOT321W-521 supports 250 nits brightness with FHD resolution. Equipped with projected capacitive multi-touch screen or 5-wire resistive touch, the GOT321W-521 is user-friendly for operators. The touch glass surface is also up to 3H for anti scratch.



## Specifications

Front Bezel	Aluminum w/ IP65/NEMA 4 rugged protection	
LCD Panel	Display Type	21.5" FHD TFT
	Brightness	250 nits
	Resolution	1920 x 1080 pixels
	Viewing Angle	178°/178°
Main System	CPU	LGA1151 9th/8th gen Intel® Core™ i7/i5/i3, Intel® Pentium® Gold or Intel® Celeron® processor (up to 35W)
	Chipset	Intel® H310
	System Memory	1 x 260-pin DDR4-2666/2400 SO-DIMM, up to 32GB
	BIOS	AMI UEFI BIOS
	Storage	1 x mSATA 1 x 2.5" SATA HDD/SSD (7 mm and 9.5 mm height; removable)
	Drive	N/A
	Watchdog Timer	255 levels, 0 to 255 sec.
	Onboard Graphics	Intel® integrated Gfx graphic engine
IO Connector	1 x 9-pin D-sub Male for RS-232	
	1 x RS-232/422/485	
	2 x RJ-45 GbE LAN	
	2 x USB 3.0	
	2 x USB 2.0	
	1 x Phoenix-type connector for DC power input	
	1 x Switch for power on/off (ATX)	
	1 x Line-out	
	1 x HDMI 1.4b	
	1 x DisplayPort v1.2 (DisplayPort++)	
	1 x VGA	
	1 x Remote power switch	
	1 x AT/ATX switch (DC type only)	
1 x Grounding hole (DC version)		
TPM	TPM 2.0	
Expansion Interface	1 x Full-size PCI Express Mini Card slot (PCIe + SATA + USB)	
	1 x M.2 Key E 2230 (for Wi-Fi)	
Touchscreen	10-point projected capacitive multi-touch	
	5-wire flat resistive touch	
Power Supply	+12V/+19V/+24VDC	
	1 x Terminal block	
Power Consumption	105W	
Dimensions (W x D x H)	547.59 x 75.6 x 339.05 mm (21.56" x 2.98" x 13.49")	
Packing Dimensions (W x D x H)	720 x 210 x 550 mm (28.34" x 8.27" x 2.17")	
Weight (net/gross)	8.4 kg (18.5 lb)/11.3 kg (24.9 lb)	
Operating Temperature	0°C to +50°C (+32°F to +122°F)	
Relative Humidity	20% to 90% @ +40°C; non-condensing	
Operating Vibration	1.0G, 5 to 500Hz, random	
Certifications	CE	

## Ordering Information

GOT321W-521-C-DC (P/N: E22B321105)	21.5" FHD TFT fanless touch panel computer with LGA1151 socket 9th/8th gen Intel® Core™ i7/i5/i3, Intel® Pentium® Gold or Intel® Celeron® processor (up to 35W), projected capacitive multitouch screen, and 24 VDC terminal block with small Phoenix connector
GOT321W-521-R-DC (P/N: E22B321106)	21.5" FHD TFT fanless touch panel computer with LGA1151 socket 9th/8th gen Intel® Core™ i7/i5/i3, Intel® Pentium® Gold or Intel® Celeron® processor (up to 35W), resistive touch screen, and 24 VDC terminal block with small Phoenix connector

\* Other configuration by request

\* Specification and certifications may vary based on different requirements



---

## Packing List

1 x GOT321W-521  
1 x Phoenix connector  
1 x Panel mount kit

---

## Optional Accessories

Wi-Fi kit

E29R131114	Wall mount kit
509000001500	Adaptor 24V/120W, wire only, FSP120-AAAN3
594K6220210E	Remote power cable, L=720 mm

---

## Optional OS Installation

Windows® 11/10 IoT Enterprise

---

## Optional OS Installation

Windows® 11/10

---

## Dimensions

