

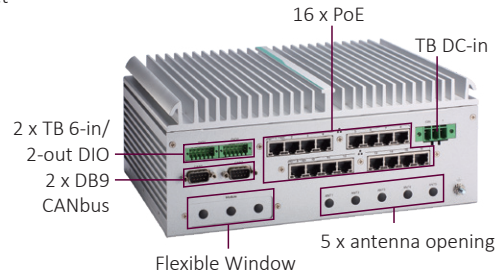
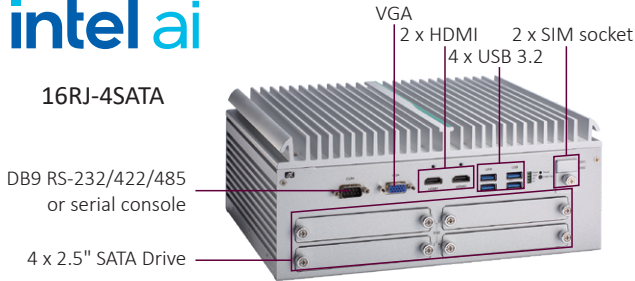
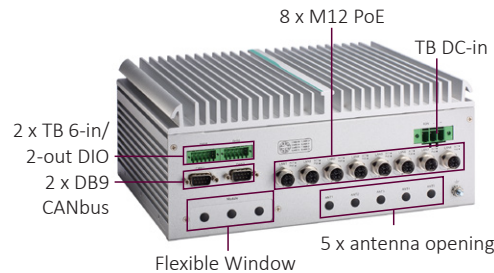
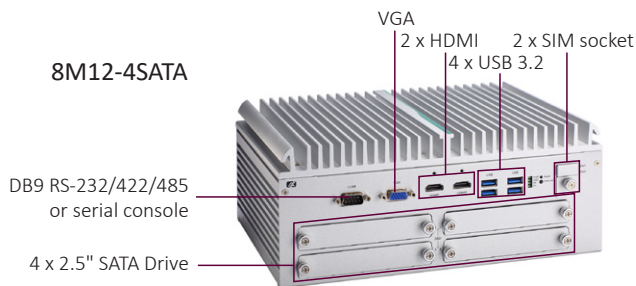


UST520

Fanless Embedded System with LGA1700 14th/13th/12th Gen Intel® Core™ i9/i7/i5/i3 or Celeron® Processor, Intel® R680E, 9 to 60 VDC for Onboard Intelligent Surveillance Application

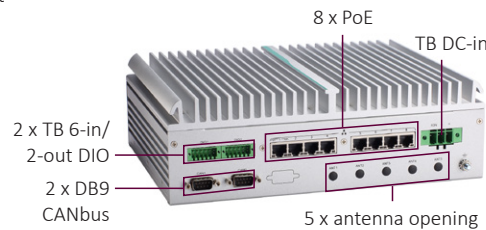

Flexible I/O window design

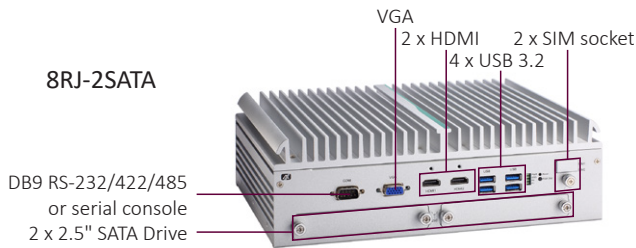

▲ Front view

▲ Rear View



Features

- CE, FCC, E-Mark and R118 certified
- LGA1700 14th/13th/12th Gen Intel® Core™ i9/i7/i5/i3 or Celeron® processor (35W) with Intel® R680E
- Qualified Intel® ESQ for Metro AI Suite Devices
- Fanless and wide operating temperatures from -40°C to +70°C
- 8/16 2.5 GbE PoE port by M12/RJ-45 connector type for efficient camera network management
- Intelligent solution of vehicle power management (smart ignition)
- Up to 4 convenient swappable SATA trays for high-capacity video recording



Specifications

CPU	LGA1700 14th/13th/12th Gen Intel® Core™ i9/i7/i5/i3 or Celeron® processor (CPU TDP max. 35W)																
Chipset	Intel® R680E																
System Memory	2 x 262-pin DDR5-5600 SO-DIMM, up to 64GB																
System I/O Outlet	<table border="0"> <tr> <td>Serial</td> <td>1 x DB9 serial console (RS-232/422/485, 5 V / 1 A on pin 9)</td> </tr> <tr> <td>Display</td> <td>1 x VGA (supports up to 1920 x 1080 @ 60Hz) 2 x HDMI (supports up to 4K/2K @ 50Hz)</td> </tr> <tr> <td>PoE (PSE, Power Sourcing Equipment)</td> <td>Up to 8 x RJ-45 & 8 x M12/ 16 x RJ-45 PoE output max. 120W supports PoE & PoE+ <ul style="list-style-type: none"> • PoE (802.3af 15.4W/port) • PoE+ (802.3at 30W/port) </td> </tr> <tr> <td>Ethernet</td> <td>Flexible LAN selection: <ul style="list-style-type: none"> • 8 x PoE RJ-45 2.5GbE LAN with 2 SATA (Intel® I226-IT) • 8 x PoE M12 X-code 2.5GbE LAN with 4 SATA (Intel® I226-IT) • 16 x PoE RJ-45 2.5GbE LAN with 4 SATA (Intel® I226-IT) </td> </tr> <tr> <td>USB</td> <td>4 x USB 3.2 Type A Gen 1</td> </tr> <tr> <td>DIO</td> <td>2 x terminal block isolated 6-in/2-out DIO (isolation voltage: 2 kV)</td> </tr> <tr> <td>CAN bus</td> <td>2 x DB9 with CAN bus 2.0 A/B, SocketCAN supported (J1939 optional)</td> </tr> <tr> <td>Others</td> <td>1 x reset button 5 x antenna opening 2 x external accessible SIM card socket 1 x flexible I/O window (4 SATA version) 1 x DB9 knockout expansion (2 SATA version)</td> </tr> </table>	Serial	1 x DB9 serial console (RS-232/422/485, 5 V / 1 A on pin 9)	Display	1 x VGA (supports up to 1920 x 1080 @ 60Hz) 2 x HDMI (supports up to 4K/2K @ 50Hz)	PoE (PSE, Power Sourcing Equipment)	Up to 8 x RJ-45 & 8 x M12/ 16 x RJ-45 PoE output max. 120W supports PoE & PoE+ <ul style="list-style-type: none"> • PoE (802.3af 15.4W/port) • PoE+ (802.3at 30W/port) 	Ethernet	Flexible LAN selection: <ul style="list-style-type: none"> • 8 x PoE RJ-45 2.5GbE LAN with 2 SATA (Intel® I226-IT) • 8 x PoE M12 X-code 2.5GbE LAN with 4 SATA (Intel® I226-IT) • 16 x PoE RJ-45 2.5GbE LAN with 4 SATA (Intel® I226-IT) 	USB	4 x USB 3.2 Type A Gen 1	DIO	2 x terminal block isolated 6-in/2-out DIO (isolation voltage: 2 kV)	CAN bus	2 x DB9 with CAN bus 2.0 A/B, SocketCAN supported (J1939 optional)	Others	1 x reset button 5 x antenna opening 2 x external accessible SIM card socket 1 x flexible I/O window (4 SATA version) 1 x DB9 knockout expansion (2 SATA version)
Serial	1 x DB9 serial console (RS-232/422/485, 5 V / 1 A on pin 9)																
Display	1 x VGA (supports up to 1920 x 1080 @ 60Hz) 2 x HDMI (supports up to 4K/2K @ 50Hz)																
PoE (PSE, Power Sourcing Equipment)	Up to 8 x RJ-45 & 8 x M12/ 16 x RJ-45 PoE output max. 120W supports PoE & PoE+ <ul style="list-style-type: none"> • PoE (802.3af 15.4W/port) • PoE+ (802.3at 30W/port) 																
Ethernet	Flexible LAN selection: <ul style="list-style-type: none"> • 8 x PoE RJ-45 2.5GbE LAN with 2 SATA (Intel® I226-IT) • 8 x PoE M12 X-code 2.5GbE LAN with 4 SATA (Intel® I226-IT) • 16 x PoE RJ-45 2.5GbE LAN with 4 SATA (Intel® I226-IT) 																
USB	4 x USB 3.2 Type A Gen 1																
DIO	2 x terminal block isolated 6-in/2-out DIO (isolation voltage: 2 kV)																
CAN bus	2 x DB9 with CAN bus 2.0 A/B, SocketCAN supported (J1939 optional)																
Others	1 x reset button 5 x antenna opening 2 x external accessible SIM card socket 1 x flexible I/O window (4 SATA version) 1 x DB9 knockout expansion (2 SATA version)																
Storage	<table border="0"> <tr> <td>SATA Drive</td> <td>2 x 2.5" 15 mm swappable SATA drive with 2 SATA, Intel® RAID 0/1 supported 4 x 2.5" 15 mm swappable SATA drive with 4 SATA, Intel® RAID 0/1/5/10 supported</td> </tr> </table>	SATA Drive	2 x 2.5" 15 mm swappable SATA drive with 2 SATA, Intel® RAID 0/1 supported 4 x 2.5" 15 mm swappable SATA drive with 4 SATA, Intel® RAID 0/1/5/10 supported														
SATA Drive	2 x 2.5" 15 mm swappable SATA drive with 2 SATA, Intel® RAID 0/1 supported 4 x 2.5" 15 mm swappable SATA drive with 4 SATA, Intel® RAID 0/1/5/10 supported																
Expansion Interface	<table border="0"> <tr> <td>1 x full-size PCI Express Mini Card slot (PCIe/USB) for LTE/GPS/Wi-Fi/I/O expansion</td> </tr> <tr> <td>1 x half-size PCI Express Mini Card slot (USB) for GPS</td> </tr> <tr> <td>1 x M.2 2280/2242 Key M (PCIe x4/SATA) for NVMe</td> </tr> <tr> <td>1 x M.2 3052 Key B (USB 3.0/2.0) for 5G/LTE</td> </tr> <tr> <td>1 x M.2 2230 Key E (PCIe/USB) for Wi-Fi/BT</td> </tr> </table>	1 x full-size PCI Express Mini Card slot (PCIe/USB) for LTE/GPS/Wi-Fi/I/O expansion	1 x half-size PCI Express Mini Card slot (USB) for GPS	1 x M.2 2280/2242 Key M (PCIe x4/SATA) for NVMe	1 x M.2 3052 Key B (USB 3.0/2.0) for 5G/LTE	1 x M.2 2230 Key E (PCIe/USB) for Wi-Fi/BT											
1 x full-size PCI Express Mini Card slot (PCIe/USB) for LTE/GPS/Wi-Fi/I/O expansion																	
1 x half-size PCI Express Mini Card slot (USB) for GPS																	
1 x M.2 2280/2242 Key M (PCIe x4/SATA) for NVMe																	
1 x M.2 3052 Key B (USB 3.0/2.0) for 5G/LTE																	
1 x M.2 2230 Key E (PCIe/USB) for Wi-Fi/BT																	
TPM	TPM 2.0																
BIOS	AMI																
Watchdog Timer	255 levels, 1 to 255 sec.																
System Indicator	1 x LED indicator for SATA drive activity 1 x LED indicator for power 2 x programmable																
Power Supply	1 x terminal block, 12/24/48 VDC with smart ignition**																
Power Consumption (Max.)	252 W																
Operating Temperature	-40°C to +70°C (-40°F to +158°F) with W.T. peripheral*																
Storage Temperature	-40°C to +85°C (-40°F to +185°F)																
Relative Humidity	10% to 95% relative humidity, non-condensing																
Shock (Operation)	Half-sine wave, 3 times for each axis, 50G acceleration																
Vibration (Operation)	3 Grms with SSD (5 to 500Hz, X/Y/Z direction; random, operating) 1 Grms with HDD (5 to 500Hz, X/Y/Z direction; random, operating) 2 Grms with HDD & Anti-Vibration Kit (5 to 500Hz, X/Y/Z direction; random, operating)																
IP Rating	IP30																
Construction	Aluminum extrusion and heavy-duty steel																
Dimensions (W x D x H)	8RJ 2SATA SKU: 280 x 210.5 x 89 mm (11.02" x 8.29" x 3.5")* 8M12 4SATA SKU: 280 x 210.5 x 117 mm (11.02" x 8.29" x 4.6")* 16RJ 4SATA SKU: 280 x 210.5 x 117 mm (11.02" x 8.29" x 4.6")* *Without wall mount																
Packing Dimensions (W x D x H)	454 x 365 x 353 mm (17.87" x 14.37" x 13.9")																
Weight (net/gross)	8RJ 2SATA SKU: 5.8 kg (12.8 lbs)/8.2 kg (18.1 lbs) 8M12 4SATA SKU: 7.3 kg (16.1 lbs)/9.5 kg (20.9 lbs) 16RJ 4SATA SKU: 7.3 kg (16.1 lbs)/9.5 kg (20.9 lbs)																
Mounting Type	Wall mount																
Certifications	CE (Class A), FCC (Class A), E-Mark and R118 certified CE/FCC EN 55032 (Class A), EN 55035, and FCC part 15 B (Class A) E-Mark ECE-R10																
OS Support	Windows® 11 64-bit, Linux																
Software Support	DigiHub Mobility (AXView), smart ignition, PoE management, digital I/O control, and hardware monitoring																

*Wide Temperature. All W.T. supported products have to be sorted by Axiomtek.

**UST520 also supports 9 to 60VDC for general purpose. Please refer to the user manual for configuration settings.

Ordering Information

UST520-RLS-A (P/N: E274520100)	Fanless embedded system with 14th/13th/12th Gen Intel® desktop processor (LGA1700), R680E, VGA, 2 HDMI, 2 6-in/2-out DIO, 2 CAN, COM, 4 USB 3.2, 8 RJ-45 PoE 2.5 GbE LAN, 2 SATA drive, smart ignition, and TDC*
UST520-RLS-B (P/N: E274520101)	Fanless embedded system with 14th/13th/12th Gen Intel® desktop processor (LGA1700), R680E, VGA, 2 HDMI, 2 6-in/2-out DIO, 2 CAN, COM, 4 USB 3.2, 16 RJ-45 PoE 2.5 GbE LAN, 4 SATA drive, smart ignition, and TDC*
UST520-RLS-C (P/N: E274520102)	Fanless embedded system with 14th/13th/12th Gen Intel® desktop processor (LGA1700), R680E, VGA, 2 HDMI, 2 6-in/2-out DIO, 2 CAN, COM, 4 USB 3.2, 8 M12 X-code PoE 2.5 GbE LAN, 4 SATA drive, smart ignition, and TDC*

*TDC: terminal block DC-in connector, DC voltage input

Optional

Anti-Vibration Kit (P/N: 8816N5008A0E)	For in-vehicle/rolling stock which improves HDD stability in NVR applications	
Communication Modules	TBD	
AC DC Adapter	50906A24000E	Adapter 24V230W FSP230-AAAN3 WIRE FSP (only for office testing purpose)
Cable/Power Cord	594B8152710E	LAN cable, M12 X-code/RJ-45 plug, CAT6, 180 cm
	599000001100	P Cord YP12/YC12_CY-U0032 YUNG_LI 1830 mm
	59906000010E	Power cord YP-12/YC-12 (Japan)
	59903000000E	Power cord YP-22/YC-12 (Europe)
	59905000000E	Power cord YP-35/YC-12 (Australia)
	59904010000E	Power cord/UK YP-61A/YC-12 L=1830 mm

*Specifications and certifications may vary based on different requirements.

Packing List

- 1 x CPU thermal paste
- 4 x memory thermal pads
- 1 x HDD screws x 8/16
- 1 x power input 3-pin terminal block
- 2 x DIO 12-pin terminal block
- 1 x wall mount kit
- 1 x screw Pack

Power Protection

OCP (over current protection)

OVP (over voltage protection)

UVP (under voltage protection)

RPP (reverse polarity protection)

ISO 7637-2 pulse 1, 2a, 2b, 3a, 3b, and 4 (vehicle version)



Setting for in-vehicle battery protection: system will be automatically turned down at low voltage level.

Setting for ignition control: system will activate a counter at low battery voltage, with IGN ON and IGN OFF delay.




Dimensions


Unit: mm

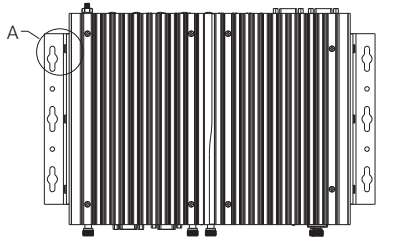





Front side





Rear side

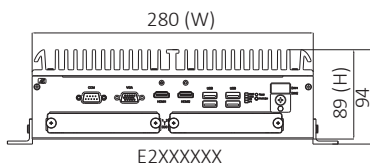


E2XXXXXX

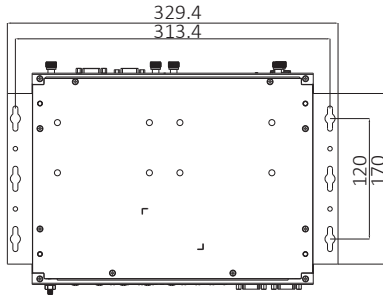


Rate: 2.000

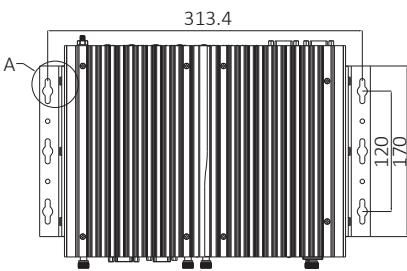




Front side

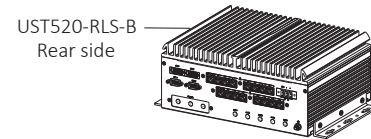



UST520-RLS-B
Rear side

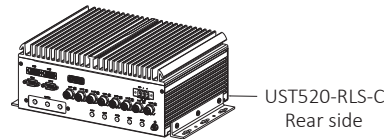


UST520-RLS-C
Rear side

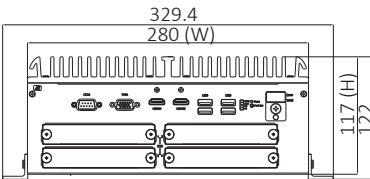

UST520-RLS-B



Rate: 2.000



UST520-RLS-C