


# PANEL5155-807

Open Frame 15" TFT Panel Computer for KIOSK Application



## Features

- ▶ Flexible front panel open frame design
- ▶ Supports SAW/Resistive type touch screen
- ▶ Slim design: thickness 79mm
- ▶ Supports Intel® Pentium® M or Celeron® M CPU
- ▶ Supports embedded O.S: Windows® CE.NET and Windows® XP Embedded
- ▶ Supports Panel/Wall/VESA mount

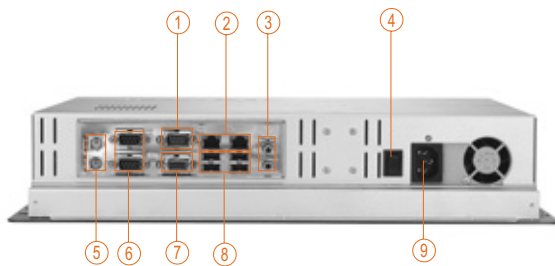

- |                    |                |
|--------------------|----------------|
| 1. COM 3           | 6. COM 1 & 2   |
| 2. LAN             | 7. VGA         |
| 3. Mic-in, Lin-out | 8. USB 2.0 x 4 |
| 4. Power switch    | 9. AC power    |
| 5. PS2 x 2 (KB/MS) |                |



## Specifications

LCD Panel	15" XGA TFT Brightness: 260 nits View Angle: vertical: 100°; Horizontal: 120° Resolution: 1024 x 768 pixel
Main System	Main Board: SBC86807
	CPU: Socket 478 for Intel® Pentium® M / Celeron® M processors with FSB 400MHz
	Chipset: Intel® 852GM + ICH4
	System Memory: 1 x 184-pin DDR DIMM max. up to 1GB
	BIOS: Award 4Mbit with RPL/PEX LAN boot ROM, SmartView and customer CMOS backup.
	SSD: CompactFlash Type-II Socket
	Watchdog Timer: Reset supported; 255 levels
	Serial Port: Integrate Intel® 852GM GMCH
	PS/2 Interface: PS/2 keyboard/mouse x 2
	Hard Disk Drive: 1 x 3.5" or 1 x 2.5"
	USB: 4 x USB 2.0 compliant
	Ethernet: 1 x 10/100 Base-T with WOL 1 x 10/100/1000 Base-T with WOL

I/O Connectors	D-sub 9-pin 3 (male) for RS-232 P/S 2 x 2 for Keyboard and Mouse RJ-45 x 2 for Ethernet USB connector x 4 D-sub 15-pin x 1 (female) for S-VGA output Line-out/Mic-in
Touchscreen	SAW type/Resistive type
Power Supply	AC 90~230V, 180W, DC 24V, 120W
Dimensions	414.5mm (16.32")(W) x 83.3mm(3.28")(D) x 339.5mm(13.37")(H)
Weight	8.8 Kg (19.4 lb)
Certification	CE
Environmental	Operation temperature: 0°-45°C (32° -113°F) Relative humidity: 20-90%

## Ordering Information

PANEL5155-807S	15" open frame TFT slim panel PC w/ SAW T/S
PANEL5155-807R	15" open frame TFT slim panel PC w/ resistive T/S

## Optional Accessories

E202003330	VM-101 (VESA ARM clamp type)
E202003329	VM-105 (VESA ARM wallmount)

## Optional EOS Installation

Windows® XP Embedded
Windows® CE.NET

## Optional OS Installation

Windows® 95/98
Windows® NT/2000/XP
Linux Kernel 2.4

Medical Panel Computers

PANEL2000 Slim Client Panel Computers

GOT Fanless Touch Panel Computers

PANEL 1000/5000 Industrial Panel Computers

Industrial Workstations

PANEL6000 Industrial Flat Panel Monitors



## Dimensions

